

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application

Inventors: Emad N. FARAG
Michael FLANAGAN

Docket No.: 2925-0326P

Lucent Case No.: 117793/FARAG 3

Title: METHOD AND APPARATUS FOR DYNAMICALLY
ADJUSTING ACQUISITION SEARCH WINDOW

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

Date: June 9, 2000

Sir:

Enclosed are the following papers relating to the above-named application for patent:

Specification 24 sheets
Formal Drawings (6 sheets)
Assignment with Cover Sheet
Declaration and Power of Attorney

The fee has been calculated as shown below:

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	16 - 20	0	x \$18. =	\$0
Independent Claims	3 - 3	0	x \$78. =	\$0
Multiple Dependent Claim(s), if applicable			x \$260. =	0
BASIC FEE				\$690.00
			TOTAL FEE	\$690.00

3c88a U.S. PTO
09/591560
06/09/00

09/591560:060900

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of \$690.00, to cover the filing fee. Triplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.


Please address all correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP
P.O. Box 747
Falls Church, Virginia 22040-0747

Telephone inquiries may be directed to the undersigned representative at (703) 205-8000.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By: 
Gary D. Yacura
Reg. No. 35,416

GDY/MSR:jcp

Attorney for Applicant

METHOD AND APPARATUS FOR DYNAMICALLY ADJUSTING ACQUISITION SEARCH WINDOW

Field of the invention:

The present invention relates to a method for detecting a multipath signal component at a receiver in a mobile wireless system, including a cellular telephone system.

5 Background of the invention:

In general, transmitted data is received by a receiver along different paths (i.e., "multipath"), primarily due to signal reflections off buildings, hills, mountains, trees, etc., located between the transmitter and the receiver. This effect is magnified when one of the
10 system terminals is a mobile terminal (such as in an automobile). Figure 1 illustrates an example of multipath between a base station 100 and a mobile terminal 102, in which signals are transmitted, for example, directly (104), reflected off a mountain (106), and reflected off a building (108).

15 Because the different multipath components travel different distances before reaching the base station 100, they reach the base station 100 at different times.

09591560.1060900

0501560.060900

Voice transmission, for example, is transmitted continuously across a narrow bandwidth wireless channel. On the other hand, packet data transmission occurs only sporadically (by definition, based on the intermittent transmission of data "packets"), but uses a large bandwidth when it does occur. A large number of packet data channels can share a wireless channel, because only one packet data channel having data to transmit will be actively sending data packets at any one time, whereas all other packet data channels will be quiet. Thus, the packet data channels in effect take turns sending packet data across the wireless channel.

In view of the foregoing, a particular problem occurs in packet data transmission between a mobile terminal and a base station. Specifically, the mobile terminal transmits packet data during an active period and is silent during an inactive period. The problem arises because the mobile terminal, by definition, moves relative to the base station, during both the active and inactive periods.

Finding new multipath components during the movement of the mobile terminal during an active period (i.e., while packet data is being transmitted) is processed in a conventional manner in what is known in the art as a "standard search." For example, it is conventionally known to use a "rake receiver" in base-band receiver systems, using code-division multiple access (CDMA). Each rake receiver has rake fingers, each of which independently tracks a

respective received multipath component. Each rake finger adaptively cancels delay spread between multipath components, adjusts the phase between the multipath components, and equalizes the level of output of the received signal. The rake receiver can therefore receive simultaneous signals corresponding to each multipath component from the same CDMA carrier.

A CDMA base-band receiver also includes a searcher subsystem for finding new multipath components by scanning received data. The multipath components may be particularly indicated by pre-defined symbol patterns called pilot symbols, which are known to the receiver. Alternatively, the received energy at different delay offsets may be measured in the search window to locate the multipath components. The CDMA base-band receiver also includes a rake finger management system for setting up and tearing down rake fingers based on information provided by the searcher subsystem.

Figure 2 is a flow chart illustrating a conventional approach to moving between active and inactive periods of data transmission at the receiver. Detection of multipath components during movement of the mobile terminal during an active period (i.e., while packet data is being transmitted) is processed in a conventional manner by the searcher and rake finger management subsystems of the base station. More specifically, once a valid multipath component is acquired and assigned to a rake finger in the rake receiver, standard searches are

performed in a known manner, using a standard search window associated with the rake finger having the strongest power. Standard search requests (indicated by 200 in Figure 2) are performed until the mobile terminal goes into the inactive state, at which time the receiver loses contact with the mobile terminal. Standard search requests are performed in accordance with known methods in a variety of ways.

If data transmission stops (i.e., if an inactive period starts), as determined at 202 in Figure 2, an acquisition search request is processed, as indicated by 204. During the inactive period the mobile terminal cannot be tracked because there is no data being transmitted, including pilot symbols. Therefore, when a mobile terminal switches from inactive to active, an acquisition search 204 is needed to determine the location of the mobile terminal. Acquisition searches are performed continuously during the inactive period because receiver does not know when the transmitter will have data to transmit. The receiver must therefore be on the "lookout" for an incoming signal.

An example of an acquisition search process 204 used by a conventional searcher subsystem is schematically illustrated in Figure 3. As shown, a sample of a detected input signal 302 is multiplied in a known manner with a sample of a reference signal 304 equal in length to the input signal sample, using a multiplier 306. Both the input signal 302 and the reference signal 304 are complex digital (e.g.,

($1 \pm j$) and $-(1 \pm j)$). Accordingly, the result of multiplying input signal 302 and reference signal 304 results in a plurality of values which are summed by adder 308 in a known manner, thereby resulting in a certain total value over the entire sample. That total value is stored, for example, in memory register 310.

Thereafter, the reference signal 304 is shifted by an arbitrary amount that is less than one chip (for example, one $\frac{1}{2}$ -chip) relative to the input signal 302 in a known manner by signal shift controller 312. The process of multiplying the input signal 302 and reference signal 304 (now shifted relative to each other) is then repeated. The summed value of that operation is also stored in memory register 310. The input signal 302 and reference signal 304 are then shifted incrementally again relative to each other.

The process of shifting the input and reference signals, multiplying the signals, and storing the result is repeated over the entire "width" of the conventional acquisition search window (which is, for example, a certain number of $\frac{1}{2}$ -chips). The conventional acquisition search window corresponds to a radius of the cell associated with the receiver (e.g., 10 km).

Once the search over the entire acquisition search window is complete, the highest value stored in memory register 310 is identified in a known manner by a maximum value detector 314. That highest value is compared to a predetermined threshold value in a known

manner by a discriminator 316. Exceeding the threshold value corresponds with acquisition of a new viable multipath component, thus indicating the end of the inactive period and the start of a new active period (see step 206 in Figure 2). Therefore, a new standard
5 search request (200 in Figure 2) is started, as discussed above.

Not exceeding the threshold value corresponds with a determination that data transmission has not restarted. The process then returns to perform another conventional acquisition search (204 in Figure 2).

10 Generally, the conventional acquisition search window is substantially wider than the standard search window (to account for uncertainty in the location of the mobile terminal, which can be anywhere in the cell). However, a wide acquisition search window leads to a longer search time (because more cycles of signal shifting, multiplication, and value storage are required), which leads to a longer
15 acquisition time for acquiring the channel in question. The width of the conventional acquisition search window is not adaptively associated with, for example, the length of the mobile terminal inactive period or the last known location of the mobile terminal.

20 Long search times are problematic because when the mobile terminal enters an active state from an inactive state, a preamble is sent across the channel to the base station, prior to packet data transmission. Once transmission of the preamble is complete, the

00501560.060900

channel must be acquired and the channel and the receiver must be ready to receive the packet data transmission. If the receiver fails to acquire the channel prior to packet data transmission, part of the packet data is lost. It is therefore important to have a relatively fast acquisition search algorithm that is completed before the preamble is over. In the conventional acquisition search, time is consumed by completing a full search over the entire conventional acquisition search window, which delays the receiver being able to ready itself to receive the packet data from the mobile terminal.

Summary of the invention:

The present invention is directed to a method for acquiring a multipath component of packet data at a receiver following an inactive period of the transmitter (especially a mobile transmitter). Generally, the method according to the present invention uses a relatively narrow (relative to the conventional art) initial acquisition search window in order to reduce channel acquisition time. This permits the use of a shorter preamble, which has the effect of speeding packet data transmission.

More specifically, the method according to the present invention uses a shorter initial acquisition search window. The size of the acquisition search window according to the present invention is dynamically widened in proportion to the length of the inactive period.

In one example of the present invention, the proportionality between the width of the acquisition search window and the length of the inactive period is related to an expected maximum speed of the mobile terminal.

5 Although the present invention is primarily directed to packet data transmission, it is also applicable to streaming data transmission of voice, video, multimedia, etc.

Brief description of the drawings:

10 Figure 1 illustrates the concept of multipath signal transmission between a transmitter and a receiver;

 Figure 2 illustrates a conventional manner in which a searcher of a receiver switches between active and inactive periods of data transmission from a transmitter;

15 Figure 3 illustrates a process by which an acquisition search is performed according to the conventional art;

 Figure 4 illustrates a method by which a searcher of a receiver switches between active and inactive periods of data transmission from a transmitter in accordance with the present invention;

20 Figure 5 illustrates a process by which an acquisition search is performed according to the present invention; and

 Figure 6 is a schematic illustration of how the acquisition search window widens according to the present invention.

09501560.060900

057160-0600

5

10

20

In a CDMA system, it is known to multiply the data stream by a pseudorandom pulse sequence that has a much higher rate than the data stream. The rate of this pseudorandom sequence is the "chip rate" R_c . For a chip rate of, for example, 4.096 Mcips/s, the time between two consecutive chips (i.e., the "chip period") is 244 nsec. It is conventional to use the chip period as a unit of time. For example, 976 nsec can be expressed as 4 chip periods or 8 $\frac{1}{2}$ -chip periods, or simply as 4 "chips" or 8 " $\frac{1}{2}$ -chips."

In general, the time T_{prop} in which a signal propagates from a base station to a mobile terminal and back is given by

$$T_{prop} = \frac{2d}{c}$$

where d is the distance between the base station and the mobile terminal, and c is the speed of light.

But T_{prop} can be expressed in terms of $\frac{1}{2}$ chips as

$$T_{prop}(1/2 - \text{chips}) = \frac{4d}{c} R_c$$

where R_c is the chip rate.

Thus, for example, if $d=10$ km (i.e., the mobile terminal is at the edge of a 10 km radius cell), and $R_c = 4.096$ Mcips/s, $T_{prop} = 546 \frac{1}{2}$ -chips.

It follows that the maximum rate of change of the round trip propagation delay between the receiver and mobile terminal is twice the maximum expected velocity, divided by the speed of light, or:

$$(2)(30 \text{ m/s}) / (3 \times 10^8 \text{ m/s}) = 200 \text{ ns/s.}$$

In view of the foregoing, the maximum rate of change of the roundtrip propagation delay is $(200 \times 10^{-9} \text{ s/s}) \times (4.096 \times 10^6 \text{ chip/s}) = 0.8192 \text{ chip/s}$, or less than $5/6 \text{ chip/s}$.

5 Thus, a flow chart illustrating the process of searching for multipath components of packet data at a receiver is set forth in Figure 4. As discussed above, standard search requests 300 are conducted during the active period of data transmission. The process illustrated in Figure 4 is generally similar to that shown in Figure 2,
10 so a detailed description thereof is not repeated here, except to note the process of incrementing the acquisition search window at 408. Thus, as discussed in more detail below, the acquisition search system illustrated in Figure 3 is modified as shown in Figure 5. Where the same elements in Figure 3 are used in Figure 5 the same
15 reference numerals are used. However, the signal shift controller 612 according to the present invention operates differently than in the conventional search method, as discussed more fully below.

20 As illustrated in Figure 6, the initial acquisition search window 500 starts at W_{0s} and ends at W_{0e} . The width and location of initial acquisition search window 500 is based on the standard search window used just before the mobile terminal enters the inactive period. Conceptually, the initial acquisition search window 500 exists as a subset of the full search window, which is `WIN_SRCH_MAX` wide.

006090-09516560

The "distance" from the reference zero to W_{0s} is a delay corresponding to a certain number of, for example, chip-wise or $\frac{1}{2}$ -chip-wise shifts as discussed above relative to the conventional art. In other words, the process illustrated in Figure 3 and explained above, is delayed (i.e., the reference signal is shifted initially by W_{0s}), so that the process starts at a point corresponding to, for example, the W_{0s} th input signal/reference signal relative shift. Likewise, the process stops at, for example, the W_{0e} th input signal/reference signal shift. In net effect, this defines the smaller initial acquisition search window in accordance with the present invention. Thereafter, the process may start at an earlier shift point and end at a relatively later shift point.

Therefore, the signal shift controller 612 is additionally designed according to the present invention to delay the start of the search and conclude the search early (i.e., relative to WIN_SRCH_MAX). This pre-shifting can be accomplished by suitably controlling signal shift controller 612 to delay the start of the acquisition search and to cause an early stop thereto. In particular, the signal shift controller 612 is controlled in this manner so as to define an initial acquisition search window corresponding to the standard search window used just before entering the inactive period. For example, as illustrated in Figure 5, the signal shift controller 612 may be constructed so as to use a determination by discriminator 316 that a viable multipath component was not detected in the instant search. According to the

present invention, the search is either repeated using the same window or may be performed using an incrementally wider search window, the search window growing in proportion to the length of the inactive period. The signal shift controller 612 may therefore
5 controlled so as to redefine a new, incrementally wider search window by altering initial and ending shift points, as discussed above.

The dynamic start and end of the acquisition search window 502 (as the acquisition window grows in correspondence to the length of the inactive period) are therefore W_s and W_e , respectively. Thus,
10 the aforementioned delay becomes shorter while the early stop point is made later.

By way of illustrative example, and in accordance with the above-described example of a mobile terminal with a maximum expected speed of 30 m/s, $W_s = W_{0s} - (5/6 \text{ chip/s})t$ when $W_{0s} - (5/6 \text{ chip/s})t > 0$, and $W_s = 0$ when $W_{0s} - (5/6 \text{ chip/s})t \leq 0$. Variable "t" is
15 the time duration of the inactive period in seconds, as may be tracked by, for example, signal shift controller 612. The quantity (5/6 chip/sec) is the rate at which the search window grows (as discussed above), and may therefore be different in a different system used
20 according to the present invention (depending on the chip rate in question as well as the maximum speed of the mobile terminal).

Conversely, $W_e = W_{0e} + (5/6 \text{ chip/sec})t$ when $W_{0e} + (5/6 \text{ chip/sec})t < \text{WIN_SRCH_MAX}$ and $W_e = \text{WIN_SRCH_MAX}$ when $W_{0e} +$

00501560-060900

(5/6 chip/sec)t => WIN_SRCH_MAX, where WIN_SRCH_MAX is a constant corresponding to a maximum size of the acquisition search window. The maximum acquisition search window may, for example, be sent to cover an entire cell, whereby WIN_SRCH_MAX is set to, for
 5 example, 546 1/2-chips in the case of a cell having a 10 km radius.

In this example, therefore, the acquisition search window according to the present invention expands from between W_{0s} and W_{0e} (500) to between W_s to W_E (502), at a rate of 10 chips for every 12 seconds of inactivity.

10 The following table illustrates the speed advantage of the method according to the present invention as the length of the inactive period changes, and in comparison to a full search over a, for example, 546 1/2-chip wide static acquisition search window as in the conventional art.

Table 1: speed advantage of the present invention

Duration of Inactive State	Acquisition Search Window Only Grows To:	Search Speeded up by, compared to full search over a 546 1/2-chip acquisition window
< 6 seconds	80 (1/2 chips)	6.8 times
30 seconds	160 (1/2 chips)	3.4 times
66 seconds	280 (1/2 chips)	2.0 times

15 As can be seen in Table 1, the speed advantage of the present invention over the conventional art is particularly noticeable when the inactive period is relative short (e.g., less than 6 seconds). However, significantly faster channel acquisition can

00591560-060900

still be had with inactive periods as long as 66 seconds. The method according to the present invention is significant as the cell radius increases.

Although packet data transmission is primarily discussed
5 herein relative to the present invention, it is also applicable to streaming data transmission, including, but not limited to, voice, video, and multimedia. In particular, with respect to voice transmission, loss of synchronization conventionally results in call dropping. In accordance with the present invention, however, the
10 dynamic acquisition search window is used to reacquire a multipath component of the streaming data, in the same way the dynamic acquisition search window is used to reacquire a multipath component of packet data following an inactive period of the transmitter.

15 While there have been shown and described and pointed out fundamental novel features on the invention as applied to preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the devices illustrated, and in their operation, and in the method illustrated and
20 described, may be made by those skilled in the art without departing from the spirit of the invention. For example, it is expressly intended that all combinations of those elements and/or methods steps which perform substantially the same function in substantially the same way

09501560.060900

to achieve the same results are within the scope of the invention. For example, the collective functionality of multiplier 306 and adder 308 may be provided by other known implementations within the knowledge of one of ordinary skill. Likewise, the operation of the signal shift
5 controller for controlling search window width may be provided in another known manner within the knowledge of one of ordinary skill.

It is the invention, therefore, to be limited only as indicated by the scope of the claims appended hereto.

09591560.060900

WHAT IS CLAIMED IS:

1. A method for detecting a multipath component of packet data at a receiver, comprising:

identifying viable multipath components received by a receiver during an active period of data transmission, whereby packet data is transmitted; and

searching for a multipath component during an inactive period of said data transmission, including defining a dynamic acquisition search window having a time width which increases in proportion to a time duration of the inactive period.

2. The method according to claim 1, wherein the dynamic acquisition search window has an initial start W_{0s} and an initial end W_{0e} , and a start point as a function of time W_S and an end point as a function of time W_E , wherein:

$$W_S = W_{0s} - (5/6)t \text{ when } W_{0s} - (5/6)t > 0$$

and

$$W_S = 0 \text{ when } W_{0s} - (5/6)t \leq 0;$$

and

$$W_E = W_{0e} + (5/6)t \text{ when } W_{0e} + (5/6)t < \text{WIN_SRCH_MAX}$$

and

$$W_E = \text{WIN_SRCH_MAX} \text{ when } W_{0e} + (5/6)t \geq \text{WIN_SRCH_MAX};$$

00591560-060900

00000000000000000000000000000000

4. The method according to claim 1, wherein identifying viable multipath components during an active period of data transmission comprises searching for multipath components of packet data using a standard search window associated with a rake finger in a rake receiver having the greatest power amongst the rake fingers in the rake receiver.

5. The method according to claim 1, wherein viable multipath components received by a receiver during an active period are identified until no multipath components are received by the receiver.

6. The method according to claim 1, wherein a transmitter transmitting the packet data is a mobile terminal that moves relative to the receiver during one or both of the active period and the inactive period.

7. The method according to claim 6, wherein a width of the dynamic acquisition search window is increased in correspondence with an expected maximum speed of the mobile terminal.

8. The method according to claim 1, wherein the receiver is a mobile terminal that moves relative to a transmitter during one or both of the active period and the inactive period.

9. The method according to claim 8, wherein a width of the dynamic acquisition search window is increased in correspondence with an expected maximum speed of the mobile terminal.

10. A method for acquiring a packet data multipath component at a receiver, comprising:

associating a standard search window with a first packet data multipath component received at the receiver;

upon loss of the first packet data multipath component, defining an acquisition search window having an initial width corresponding to the standard search window;

searching for a second packet data multipath component across a width of acquisition search window; and

09501560, 060000

until a second packet data multipath component is detected, expanding a width of the acquisition search window in proportion to a period of time elapsed since loss of the first packet data multipath component and searching for a second packet data multipath component across a width of the expanded acquisitions search window.

11. The method according to claim 10, wherein searching for a second packet data multipath component comprises:

comparing a detected signal with a reference signal;

determining a value corresponding to the comparison of the detected signal and the reference signal;

repeatedly shifting the detected signal incrementally relative to the reference signal, comparing the relatively shifted detected signal and reference signal, and determining a value corresponding to the comparison of the detected signal and the reference signal, thereby obtaining a plurality of values corresponding to the comparisons between the detected signal and the reference signal, the incremental shifting continuing up to an instantaneous width of the acquisition search window;

identifying the highest value among the plurality of values corresponding to the comparisons between the detected signal and the reference signal; and

09591560.060900

comparing the highest value to a threshold value, such that exceeding the threshold value corresponds with identification of the second packet data multipath component.

12. The method according to claim 1, wherein the dynamic acquisition search window has an initial start W_{0s} and an initial end W_{0e} , and a start point as a function of time W_s and an end point as a function of time W_e , wherein:

$$W_s = W_{0s} - kt \text{ when } W_{0s} - kt > 0$$

and

$$W_s = 0 \text{ when } W_{0s} - kt \leq 0;$$

and

$$W_e = W_{0e} + kt \text{ when } W_{0e} + kt < \text{WIN_SRCH_MAX}$$

and

$$W_e = \text{WIN_SRCH_MAX} \text{ when } W_{0e} + kt \geq \text{WIN_SRCH_MAX};$$

where WIN_SRCH_MAX is an arbitrarily selected upper limit for the maximum search window size and k is a constant corresponding with a maximum rate of change of roundtrip propagation delay.

13. A method for detecting a multipath component at a receiver, comprising:

upon loss of a multipath component, searching for a new multipath component over a dynamic acquisition search window

09591560-060900

having a time width which increases in proportion to a length of time during which no multipath component is detected.

14. The method according to claim 13, wherein the dynamic acquisition search window has an initial start W_{0s} and an initial end W_{0e} , and a start point as a function of time W_s and an end point as a function of time W_e , wherein:

$$W_s = W_{0s} - kt \text{ when } W_{0s} - kt > 0$$

and

$$W_s = 0 \text{ when } W_{0s} - kt \leq 0;$$

and

$$W_e = W_{0e} + kt \text{ when } W_{0e} + kt < \text{WIN_SRCH_MAX}$$

and

$$W_e = \text{WIN_SRCH_MAX} \text{ when } W_{0e} + kt \geq \text{WIN_SRCH_MAX};$$

where WIN_SRCH_MAX is an arbitrarily selected upper limit for the maximum search window size and k is a constant corresponding with a maximum rate of change of roundtrip propagation delay.

15. The method according to claim 13, wherein searching for the new multipath component comprises:

comparing a detected signal with a reference signal;

determining a value corresponding to the comparison of the detected signal and the reference signal;

09591560.060900

repeatedly shifting the detected signal incrementally relative to the reference signal, comparing the relatively shifted detected signal and reference signal, and determining a value corresponding to the comparison of the detected signal and the reference signal, thereby obtaining a plurality of values corresponding to the comparisons between the detected signal and the reference signal, the incremental shifting continuing up to an instantaneous width of the acquisition search window;

identifying the highest value among the plurality of values corresponding to the comparisons between the detected signal and the reference signal; and

comparing the highest value to a threshold value, such that exceeding the threshold value corresponds with identification of the new multipath component.

16. The method according to claim 1, wherein the dynamic acquisition search window has an initial start point and an initial end point, and a dynamic start point that varies as a function of time and a dynamic end point that varies as a function of time.

09591560-060000

ABSTRACT OF THE INVENTION

A method for detecting packet data transmission following an inactive period of a transmitter. The method includes using a dynamic acquisition search window which grows from an initial width (determined by the size of the corresponding standard search window prior to entering the inactive period) up to a maximum width (for example, the width of a full cell) in correspondence with the length of time that the transmitter is in the inactive state. The method is particularly directed to a mobile transmitter having active and inactive periods. The method according to the present invention is also useful relative to streaming data, such as voice, including a plurality of multipath components.

09501560.060000

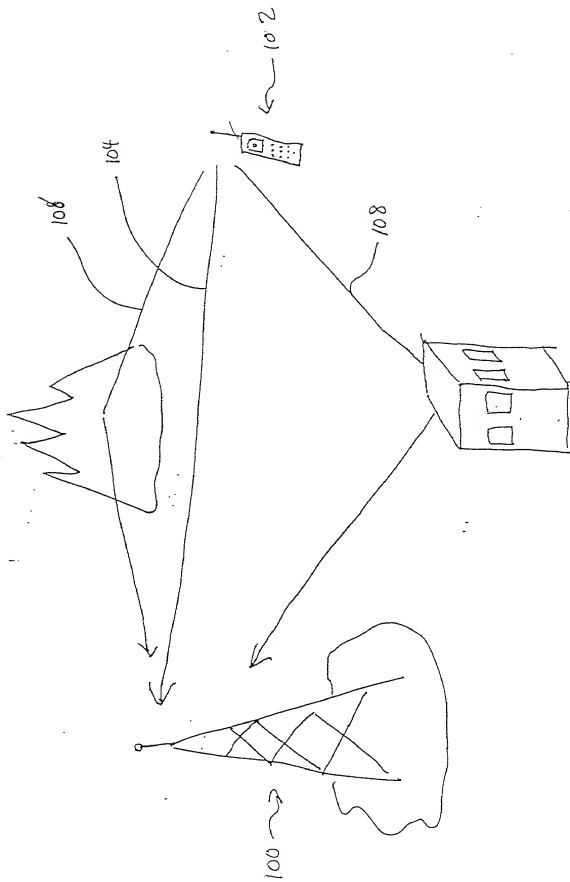


FIGURE 1

00591560-060900

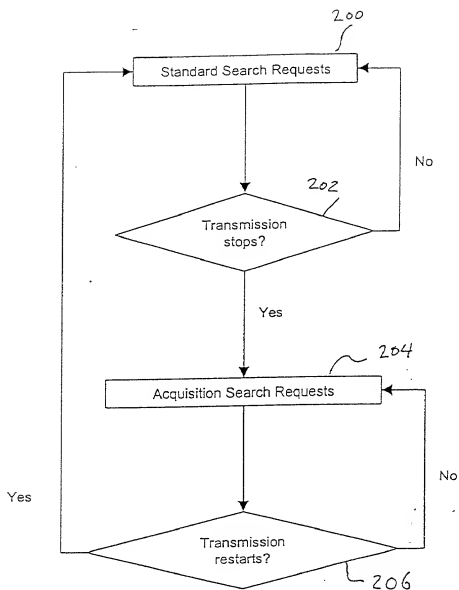


FIGURE 2

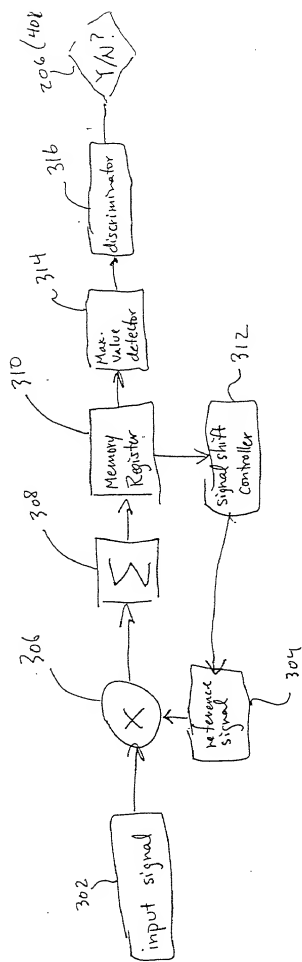


FIGURE 3

09591560.060900

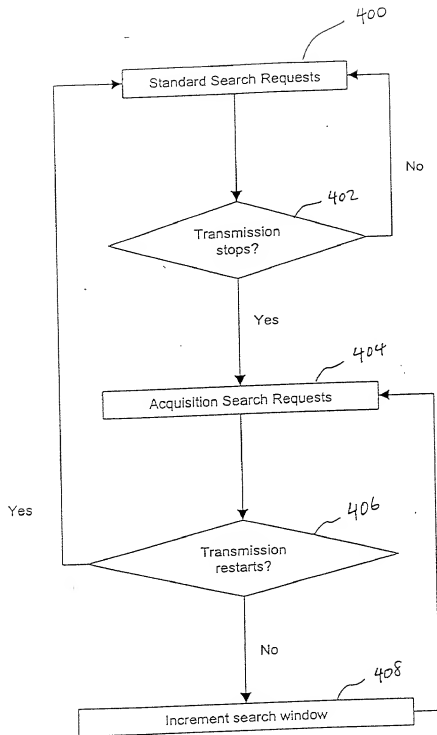


FIGURE 4

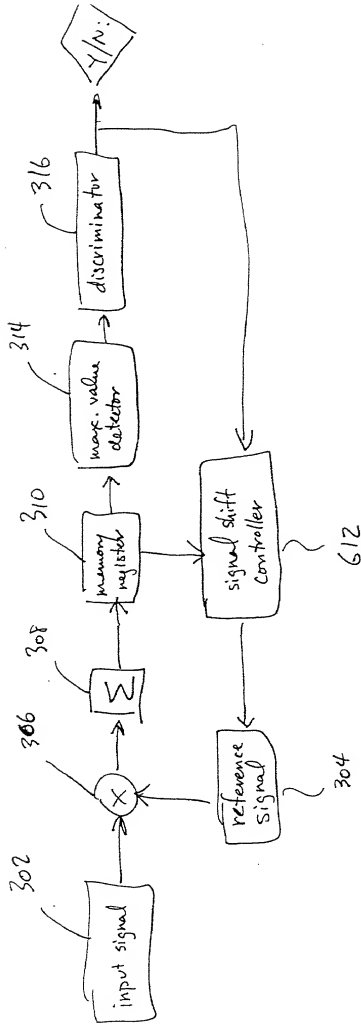


Figure 5

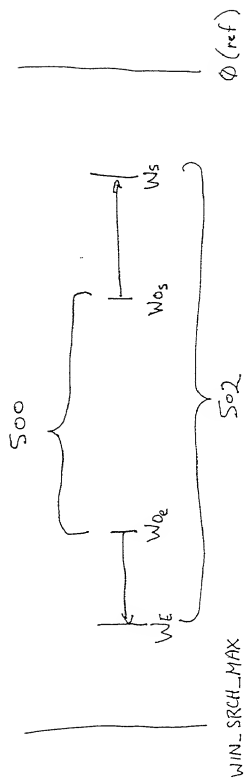


FIGURE 6

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As the below named inventors, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names.

I believe I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention **METHOD AND APPARATUS FOR DYNAMICALLY ADJUSTING ACQUISITION SEARCH WINDOW** the specification of which is attached hereto.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this declaration.

We acknowledge the duty to disclose all information known to us which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

We hereby claim foreign priority benefits under Title 35, United States Code, 119 (a) - (d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

We hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, we acknowledge the duty to disclose all information known to us to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

We hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

None

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

09501560-060900

We hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:


Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Craig J. Cox	(Reg. No. 39643)
Donald P. Dinella	(Reg. No. 39961)
Guy Eriksen	(Reg. No. 41736)
Martin I. Finston	(Reg. No. 31613)
James H. Fox	(Reg. No. 29379)
William S. Francos	(Reg. No. 38456)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Mony R. Ghose	(Reg. No. 38159)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
Michael B. Johannesen	(Reg. No. 35557)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
Christopher N. Malvone	(Reg. No. 34866)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Eugen E. Pacher	(Reg. No. 29964)
Jack R. Penrod	(Reg. No. 31864)
Daniel J. Piotrowski	(Reg. No. 42079)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Patricia A. Verlangieri	(Reg. No. 42201)
John P. Veschi	(Reg. No. 39058)
David Volejnick	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Jeffrey M. Weinick	(Reg. No. 36304)
Eli Weiss	(Reg. No. 17765)

09591560.060900

We hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Emad N. FARAG:

Inventor's signature



Date 16 May 00

Residence: Flanders, New Jersey

Citizenship: ~~United States~~

Egypt

Post Office Address: ~~44 Oakwood Village # 8, Flanders, N.J., 078361, USA~~

10 Mulligan Drive

Michael FLANAGAN:

Inventor's signature



Date 16 May 00

Residence: Chester, New Jersey

Citizenship: United States

Post Office Address: 9 Cora Lane, Chester, New Jersey, 07930, USA

00591560 060900

ATTACHMENT A

Attorney Name(s):	<u>Raymond C. Stewart</u>	Reg. No.:	<u>21,066</u>
	<u>Joseph A. Kolasch</u>		<u>22,463</u>
	<u>James M. Slattery</u>		<u>28,380</u>
	<u>Donald J. Daley</u>		<u>34,313</u>
	<u>John A. Castellano</u>		<u>35,094</u>
	<u>Gary D. Yacura</u>		<u>35,416</u>

Telephone calls should be made to Birch Stewart Kolasch & Birch, LLP at:

Phone No.: (703) 205-8000

Fax No.: (703) 205-8050

All written communications are to be addressed to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP,
P.O. BOX 747
Falls Church, Virginia 22040-0747

006090-0951560